


尺寸图




防爆证编号: CNEEx21.1477X

技术参数

	输出	型号
齐平	NPN.NO	3GDN-M12-NO2-EX
	NPN.NC	3GDN-M12-NC2-EX
	PNP.NO	3GDN-M12-PO2-EX
	PNP.NC	3GDN-M12-PC2-EX
非齐平	NPN.NO	3GDN-M12-NO4-EX
	NPN.NC	3GDN-M12-NC4-EX
	PNP.NO	3GDN-M12-PO4-EX
	PNP.NC	3GDN-M12-PC4-EX

ABS	
:2mm, :4mm 10%±	
/ ()	
:M12*52, :M12*52	
12× 12× 1t	
NPN/PNP ()	
NO/NC ()	
3.8mm 2 PUR	
24 VDC	
10-30 VDC	
齐平:800 Hz 非齐平:500 Hz	
-25 °C - +75 °C	
200 nA	
<15% (Sr)	
IEC IP67、	
LED ()	
10~55Hz 1.5mm X、Y、Z 2h	
3%	
3.3V (100mA、 2m)	
10mA	
Ex mb IIC T6 Gb/Ex mbD 21 T80	
GB3836.1-2010 1 , GB3836.9-2014 9	
GB12476.1-2013 1 , GB12476.6-2010 6	

接线图

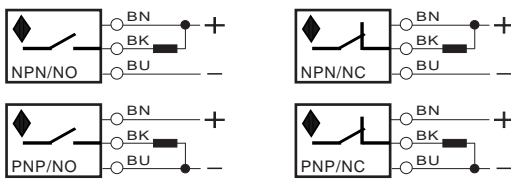

BN : BU : BK :